


ZEUS PU FOOD




Tubo trasparente in poliuretano a base etere con spirale di rinforzo in PVC rigido antiurto color avorio. Completamente liscio internamente, presenta un'eccellente resistenza all'abrasione e alla flessione, agli attacchi microbici e all'idrolisi. Spessore di parete da 1,2 mm a 2,0 mm. Versione antistatica con cordicella di rame su richiesta.

• **Industria alimentare:** aspirazione e trasporto di sostanze alimentari anche altamente abrasive (umide e secche), polveri alimentari, mangimi, granuli di varie dimensioni, zuccheri, sale e frutta secca
Alimentare secondo FDA Reg. Cfr 21-Item 17.2600 (alimenti acquosi e grassi) e Reg. UE 10/2011 (classi A, B, C, D2, E).

Transparent ether based TPU wall, with ivory anti-shock rigid PVC spiral. Smooth inside, corrugated outside. It is extremely resistant to abrasion and flexion as well as to Hydrolysis and microbes attacks. This hose features high mechanical properties. PU wall thickness from 1,2 mm to 2,0 mm. Antistatic version with copper wire on request.

• *Suction and delivery of food grade powders, animal feed, granules different size and abrasion powder, such as sugar, salt and dry fruit.*

Food grade according to FDA Reg. Cfr 21-Item 17.2600 (aqueous and fatty food) and to EU Reg. 10/2011 (classes A, B, C, D2, E).

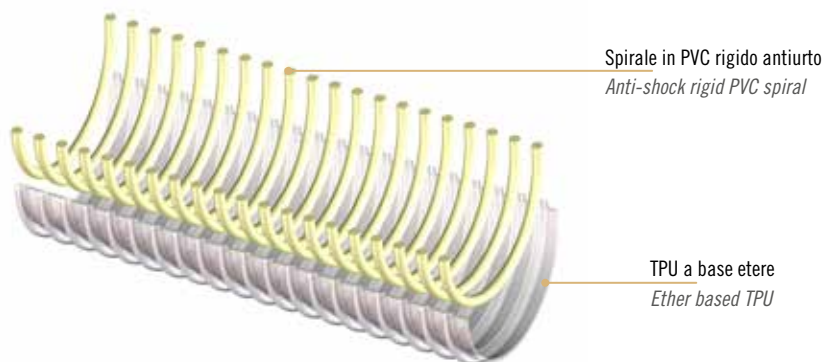

Scheda tecnica / Technical data

Codice	Ø Int.	Spess. Min.	Spess. Max.	Peso	Depr.	R. Curvatura	Lg. Rotolo	Vol.
Code	Ins. Ø	Min wall th.	Max. wall th.	Weight	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	mm	g/m	m H ₂ O	mm	m	m ³
ZE 01 030.0 000.0	30*	1,2	3,7	320	9	130	30	0,096
ZE 01 032.0 000.0	31,8	1,2	3,8	350	9	140	30	0,101
ZE 01 035.0 000.0	35*	1,3	4,0	380	9	160	30	0,110
ZE 01 038.0 000.0	38,1	1,3	4,0	420	9	180	30	0,118
ZE 01 040.0 000.0	40	1,5	4,3	500	9	190	30	0,124
ZE 01 045.0 000.0	45*	1,5	4,4	570	8	200	30	0,138
ZE 01 052.0 000.0	50,8	1,5	4,8	700	8	215	30	0,261
ZE 01 055.0 000.0	55*	1,5	4,9	780	8	225	30	0,280
ZE 01 060.0 000.0	60	1,5	5,0	870	8	230	30	0,302
ZE 01 063.0 000.0	63,5	1,5	5,0	920	8	240	30	0,318
ZE 01 065.0 000.0	65*	1,5	5,0	940	8	240	30	0,324
ZE 01 070.0 000.0	70	1,5	5,3	950	8	250	30	0,348
ZE 01 076.0 000.0	76,2	1,7	5,5	1120	8	270	30	0,377
ZE 01 080.0 000.0	80	2,0	5,9	1260	7	290	30	0,529
ZE 01 090.0 000.0	90	2,0	5,9	1410	7	380	30	0,521
ZE 01 100.0 000.0	100	2,0	6,3	1600	7	420	30	0,865
ZE 01 102.0 000.0	102	2,0	6,3	1630	7	420	30	0,880
ZE 01 110.0 000.0	110*	2,0	7,6	2220	6,5	450	30	0,962
ZE 01 120.0 000.0	120	2,0	7,6	2410	6,5	480	30	1,622
ZE 01 127.0 000.0	127	2,0	7,6	2540	6,5	530	30	1,706
ZE 01 150.0 000.0	151,5	2,0	8,1	3110	6	800	20	1,339

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / *Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity