


GEKA® plus two-way valves


Advantage / benefit: **Valves can be controlled and shut-off individually**

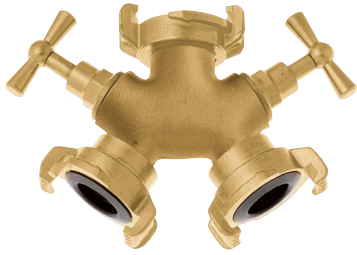

GEKA® plus two-way valve

Standard with **GEKA® plus high-performance shaped sealing rings form 300 NBR (300C), patented**, temperature range from approx. -10 °C to +90 °C
 Connection: GEKA® plus quick couplings, suitable for hose sizes of 3/8" to 1 1/2", fixed

Nominal size	1/2"
PU units	1
Covering box units	20
Catalogue no.	333C
Item no.	34.3331

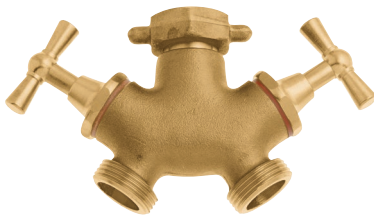

GEKA® plus two-way valve with rotatable cap nut

Connection: With rotatable cap nuts and two male thread connections

Nut thread mm	24,66
Nut thread	G3/4
Male thread mm	26,44
Male thread	G3/4
Nominal size	1/2"
PU units	1
Covering box units	30
Catalogue no.	3332
Item no.	34.3332

GEKA® two-way valves

Advantage / benefit: **Valves can be controlled and shut-off individually, „low-duty version“**

Material: Ball: Brass hard chrome-plated

Sealing: Standard with GEKA® high-performance shaped sealing ring form 200 NBR (80200C), temperature range from approx. -10 °C to +90 °C

Connection: GEKA® quick couplings, suitable for hose sizes of 3/8" to 1 1/2"



GEKA® two-way valve with ball stop valve

T-handles: Plastic, black

Nominal size	1/2"
PU units	5
Covering box units	20
Catalogue no.	331C
Item no.	33.5331



GEKA® two-way valve with regulating closing valve

Nominal size	1/2"
PU units	1
Covering box units	25
Catalogue no.	80333C
Item no.	34.3335