


Tubo in speciale Bio-compound ottenuto da fonti naturali rinnovabili, la cui produzione permette una riduzione delle emissioni di CO₂ nell'atmosfera; rinforzo di filato di poliestere ad alta tenacità.

• Trasporto di liquidi alimentari, bevande, succhi di frutta, aceto, vino e liquori con concentrazione alcolica fino a 50%. Idoneo al passaggio di latte e prodotti lattiero-caseari secondo FDA CFR 21 (item 176.170) e secondo il regolamento Europeo Reg. UE 10/2011 (classi A, B, C, D1). Viene spesso impiegato su macchine riempitrici e dosatrici.

Transparent hose produced with a special bio-based compound, obtained from natural energy sources, which production allows to save CO₂ emissions and a high tenacity polyester reinforcement.

• *Ideal solution for delivery of food liquids, beverages, fruit juices, wine and liquors with up to 50% alcohol concentration as well as for the passage of milk and dairy products, according to FDA CFR. 21 (item 176.170) and to Reg. EU 10/2011 (classes A, B, C, D1). It is often used for filling machines and dispensers.*

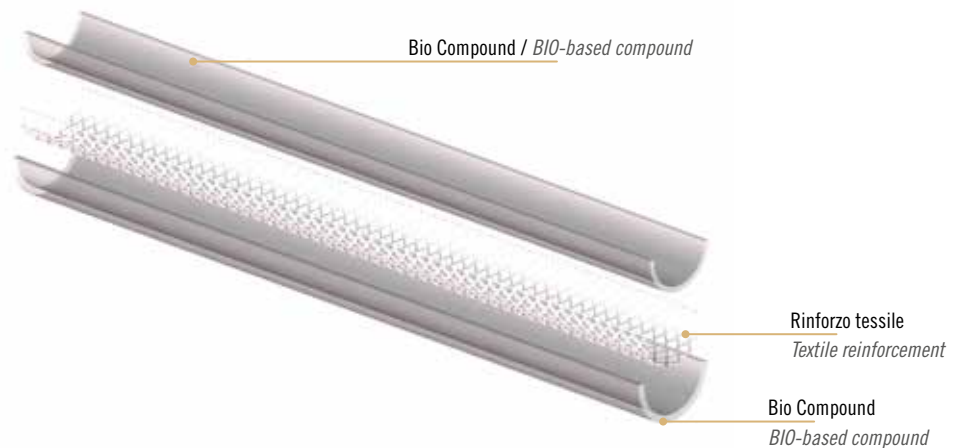

Scheda tecnica / Technical data

Codice	Ø Int.	Ø Est.	Peso	P.E.	P.S.	R. Curvatura	Lg. Rotolo	Vol.
Code	Ins. Ø	Out Ø	Weight	WP	BP	Bending	Coil lgth.	Vol.
	mm	mm	g/m	bar	bar	mm	m	m ³
B1 01 006.0 012.0	6	12	105	21	63	30	100	0,025
B1 01 008.0 014.0	8	14	130	23	69	40	100	0,032
B1 01 010.0 016.0	10	16	150	16	48	50	100	0,041
B1 01 012.0 018.0	12	18	175	12	36	60	100	0,050
B1 01 013.0 019.0	13	19	185	11	33	70	100	0,058
B1 01 016.0 022.0	16	22	220	10	30	80	50	0,095
B1 01 019.0 026.0	19	26	305	9	27	100	50	0,120
B1 01 025.0 033.0	25	33	450	8	24	130	50	0,181
B1 01 030.0 038.0	30	38	525	6	18	150	50	0,135
B1 01 032.0 042.0	32	42	710	5	15	160	50	0,146
B1 01 038.0 048.0	38	48	825	4	12	190	50	0,271
B1 01 040.0 050.0	40	50	865	4	12	200	50	0,303
B1 01 050.0 062.0	50*	62	1290	4	12	250	50	0,391

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / *Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity