


SPECIFICATION SHEET

Name of Product : **RAMP MAT**

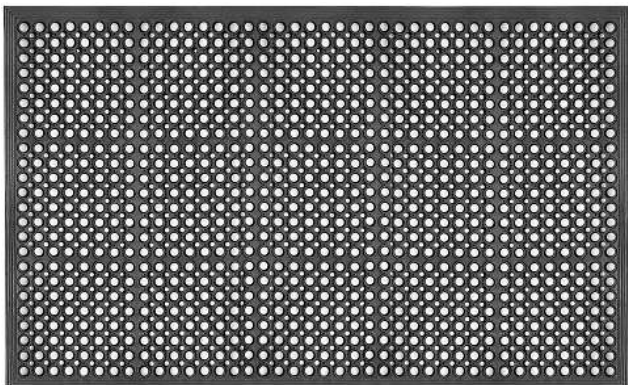

Specification	: 75 SHORE A NBR, OIL RESISTANT
Manufacturing Method	: Molding in heavy hydraulic press under high temperature
Colour	: Black
Type	: Solid with Drainage Holes
Compound	: NR with NBR
Hardness (Shore A)	: 75° +/- 5°
Density (SG)	: 1.25
Min. Temperature	: -30
Tensile Strength MPa	: 4
Properties	: Anti-slip, Oil resistant (not advisable for Petrol)
Thickness	: 12mm
Sizes	: 60x90cm, 90x90cm, 80x120cm, 90x150cm
Tolerance Limit	: +/- 5% on general values
Applications	: Shall be used for a multitude of Leisure, Industrial, workshops, machine shops, Retail and Domestic applications which include playground areas, wet area machine and person station areas, wet processing plants and door entrances.
Features	: Oil and grease resistant, Excellent drainage properties, High ground stabilization Good anti-fatigue characteristics, High impact resistance, Anti-slip finish, Low Maintenance. Petrol resistant to a certain limit (constant contact would degrade or deform)
Packing	: Bale Packing or Palletized
Cleaning	: Sweep, Vacuum or Mop
Storage Instructions	: Keep well wrapped in a dry place to avoid fungal infections, Store with dry silica gel, if infected with Fungus clean with Silicon.