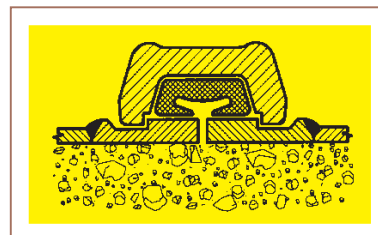


**PAMEC**

Concrete pumping &amp; placing systems

**PAMEC S.r.l.**Z.I. Punta Penna - 66054 - VASTO (CH) - Italy  
Tel. +39-0873-310000 - Fax: +39 - 0873 - 311787  
http://www.pamec.com - E-mail: info@pamec.com

## GIUNTI COUPLINGS

**in acciaio stampato a caldo**  
*in drop forged steel***SISTEMA "GU"**  
**"GU" SYSTEM (Grooved)**

### GF

Giunto fisso a leva  
*Non adjustable snap coupling*

D.N.		TIPO - TYPE	CODICE CODE No.	KG	LBS
in.	mm				
2.1/2"	65	<b>GF 25 G</b>	02 25 3 009 50	1.60	3.53
3"	75	<b>GF 30 G</b>	02 30 3 009 50	2.25	4.96
4"	100	<b>GF 40 G</b>	02 40 3 001 00	3.50	7.71
5"	125	<b>GF 50 G</b>	02 50 3 001 00	5.00	11.03
6"	150	<b>GF 60 G</b>	02 60 3 001 00	5.50	12.12



### GF - LC

Giunto fisso a leva corta  
*Non adjustable snap coupling - short lever*

D.N.		TIPO - TYPE	CODICE CODE No.	KG	LBS
in.	mm				
2"	50	<b>GF 20 G - LC</b>	02 22 3 009 60	1.05	2.31
2.1/2"	65	<b>GF 25 G - LC</b>	02 27 3 009 60	1.60	3.53
3"	75	<b>GF 30 G - LC</b>	02 32 3 009 60	2.25	4.96
4"	100	<b>GF 40 G - LC</b>	02 42 3 001 10	3.50	7.71
5"	125	<b>GF 50 G - LC</b>	02 52 3 001 10	5.00	11.03

 Tutti i giunti possono essere zincati - *All couplings can be galvanized.***CONCRETE PUMPING SYSTEMS****B G 20 00**