


NR rubber sheets

MD Centaur Blue Star BL FDA

Colour: blue
 Finish: one side mini diamond design other side 1 mm thick grey neoprene bonding layer
 Temperature range: -30° to +70°C

Features: Gutter less design for cleaner compatibility reduces belt vibration and cleaner chatter for standard applications with minimal slippage

Application: To help eliminate slippage, increase pulley life and to improve production

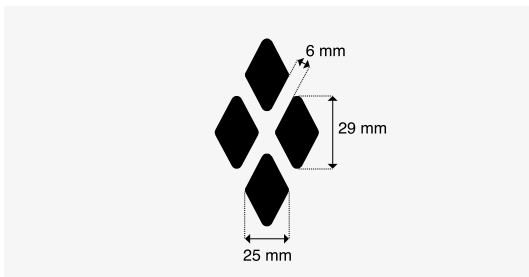

		Test method
Specific gravity grs/cm ³	1,10	DIN 53508
Hardness shore A ± 5°	55	DIN 53505
Tensile strength Mpa	15	DIN 53504
Elongation at break %	500	DIN 53504
Abrasion mm ³	120	DIN 53516
Compression set at 70°C for 22 hours %	30	DIN 53517

Thickness (mm)	No. of insertions	Width (mtr)	Length (mtr)	Article no.
8	0	2,00	10	PL55110B 8/0