



## Trellex T60

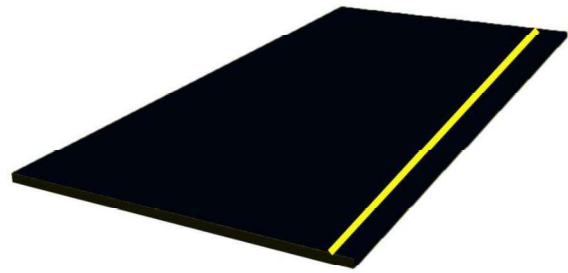

Colour: Black  
 Density: 1,13 Mg/m<sup>3</sup>  
 Hardness: 60 5 IRH  
 CL och TO up to 25mm

Nom. Thickness m	Widthca mm	Length ca mm	Nom. Weight kg/m <sup>2</sup>	kg/roll
3	1400	10000	3,5	49
4	1400	10000	4,5	63
5	1400	10000	5,6	79
6	1400	10000	6,8	95
8	1400	6000	9,0	76
10	1400	6000	11,3	95
12	1400	5000	13,6	96
15	1400	5000	17,0	119
20	1400	5000	22,6	158
25	1400	5000	28,6	200
35	1500	3000	39,6	178
50	1500	3000	57	257

## ➤ Trellex T60

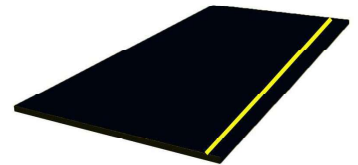

Physical Properties		T 60	
Property	Unit	Typical Values	Test method
Density	g/cm <sup>3</sup>	1,12	ISO 2781
Hardness	°IRHD	60±5	ISO 48
Tensile strenght	MPa	21,5	ISO 37
Elongation at break	%	600	ISO 37
Tear resistance	kN/m	28,5	ISO 34
Other properties			
Resistance to oil & grease	small		
Resistance to chemicals	moderate		
Temperature range	-30 to +80 °C		
Colour	Black		
Branding	Yellow stripe		